



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that by virtue of an assignment registered under the Patents Act 1977, the application is now proceeding in the name as substituted.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*AmBrewer*

Dated 14 July 2003



100-100-100



INVESTOR IN PEOPLE

GB 0229031.0


By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

BLUEWATER ENERGY SERVICES B.V.,  
Marsstraat 33,  
2132 HR Hoofddorp,  
Netherlands

Incorporated in the Netherlands,

[ADP No. 08619488001]

Patents Act 1977  
(Rule 16)

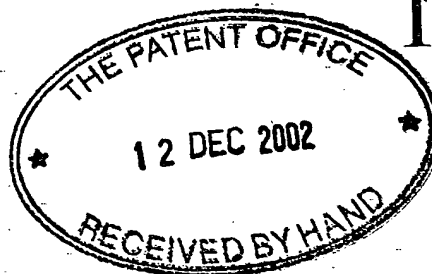

1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Concept House  
Cardiff Road  
Newport  
South Wales NP10 8QQ

1.	Your reference	SEM/61982/000		
2.	Patent application number (The Patent Office will fill in this part)	0229031.0	13DEC02 E770665-5 002882 P01/7700 0.00-0229031.0	
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	Bluewater Terminal Systems NV Zeelandia Office Park Kaya WFG (Jombi) Mensing 18 Willemstad Curacao/Netherlands Antilles 7398404001 SECTION 30(4) ACT APPLICATION FILED 24/4/03 Netherlands Antilles		
	Patents ADP number (if you know it)			
	If the applicant is a corporate body, give the country/state of its incorporation			
4.	Title of the invention	OFF-SHORE MOORING AND FLUID TRANSFER SYSTEM		
5.	Name of your agent (if you have one)	BOULT WADE TENNANT		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	VERULAM GARDENS 70 GRAY'S INN ROAD LONDON WC1X 8BT 42001 ✓		
	Patents ADP number (if you know it)	42001 ✓		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes		

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 7

Claim(s) 2

Abstract

Drawing(s) 4 *du*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*) 1

Any other documents  
(Please specify)

- 11 I/We request the grant of a patent on the basis of this application.

Signature

Date

12 December 2002

12. Name and daytime telephone number of person to contact in the United Kingdom Sarah Merrifield  
020 7430 7500

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

OFF-SHORE MOORING AND FLUID TRANSFER SYSTEM

5 The present invention relates to a system for transferring fluids, especially cryogenic fluids, to a vessel in an off-shore environment.

10 Such fluid transfer currently requires transport tankers to come into very close proximity to a production barge. This is hazardous due to the nature of the products concerned, such as liquified natural gas (LNG) and the capital-intensive equipment which must be employed.

15 The present invention provides apparatus for transferring cryogenic fluid from a first vessel to a second vessel in an off-shore environment, comprising a partly submerged floating dock, variable buoyancy means operable to alter the draught of the dock to enable engagement of the dock with the second vessel, 20 a single point mooring system attached to the dock, and at least one rigid cryogenic pipeline attached between the first vessel and the dock via flexible connection means.

25 Thus, the present invention allows a production vessel to provide fluid to a tanker, via rigid cryogenic piping and a floating dock which has an extremely benign response to the environment, i.e. it moves very little in response to wind and wave action. 30 This means that rigid flow lines become feasible in terms of strength and fatigue life. Such rigid pipelines are considerably cheaper than flexible flow lines and require less maintenance and less frequent replacement.

35 Preferably, there are two or more rigid pipelines between the dock and the first vessel and means

enabling a return flow of fluid received at the dock from one pipeline to a second pipeline. This can be used when no second vessel is engaged with the dock and such recirculation of fluid helps to keep the temperature of the fluid down to the required level.

In a preferred embodiment, the single point mooring system comprises a turret rotatably mounted to the dock and anchor lines attached to the turret. The turret may be mounted with its centreline forward of a leading edge of the dock, or rearward of a leading edge by approximately 20 to 50% of the length of the dock.

Preferably, the dock itself comprises a floor structure engagable against the hull of the second vessel and a plurality of columns projecting upwardly from the floor structure, wherein the cross-sectional area of the columns at the waterline is in the region of 20 to 25m<sup>2</sup>.

The variable buoyancy means in the dock may comprise ballast compartments extending between the columns above the waterline.

The variable buoyancy means may further comprise ballast compartments located in the floor structure beneath the waterline.

Advantageously, the dock is designed to accommodate tankers in the range from 50,000 to 150,000m<sup>3</sup>.

Furthermore, the dock may be provided with a position control system and thrust producing devices, to enable it to be aligned with an approaching tanker for ease of docking.

The invention will now be described in detail, by way of example, only with reference to the accompanying drawings in which:

5        Figure 1 is a schematic view of the mooring and transfer system in accordance with a first embodiment of the first invention;

10       Figure 1a is an enlarged view of the end of the production barge and the attached pipeline as seen in Figure 1;

      Figure 2 is a schematic side view of the floating pontoon of Figure 1;

15       Figure 2a is a cross-section of Figure 2 on the line A-A;

20       Figure 2b is a cross-section of Figure 2 along the line B-B;

      Figure 3 is a schematic view of the pontoon of Figures 1 and 2 engaged with a tanker; and

25       Figure 4 is a perspective view of the floating pontoon of Figures 1 to 3.

      A first embodiment of the present invention is illustrated in Figure 1. The mooring and fluid  
30       transfer system includes a floating dock in the form of a pontoon 1 formed by two rows of substantially vertical columns 7 projecting both above and below the water line. Below the water line the two rows are joined by a network of longitudinal and lateral  
35       horizontal limbs 20, 21. Above the waterline, the columns 7 in each row are joined by longitudinal limbs 22. This is best seen in Figure 4. The pontoon 1



is designed to have a small water line area and a relatively high mass.

5 An anchoring system 2, which allows the pontoon 1 to weathervane around a single point mooring system 3, is attached to the pontoon 1. A position control system with thrust producing devices 4 integrated into the pontoon 1 allows adjustment of the position of the pontoon 1 in the sea against the restoring force of  
10 the anchoring system 2. Thus, the position of the pontoon 1 can be altered to assist with alignment with an approaching tanker, so that the tanker can pass between the two rows of columns 7 for docking.

15 The pontoon 1 is fitted with means to regulate its draught so that it can be raised in the water to dock against the underside of a tanker with excess buoyancy force, such that the horizontal friction between the pontoon 1 and the tanker is sufficient to  
20 ensure that both structures move in unison under the effect of sea current and wind forces.

The pontoon 1 is fitted with means to receive cryogenic fluids from a floating production barge 5  
25 moored some distance away, such as around 2000m. This means comprises of one or more flow lines 6 suspended between the production barge 5 and the pontoon 1. The flow lines 6 may be single or doubled walled steel pipes, with or without insulation  
30 material as the need to conserve heat dictates.

The flow lines 6 are attached to the pontoon 1 by a connecting member 9, best seen in Figure 2, which may be a chain, wire or a rod. The end 10 of the  
35 flow line 6 is connected to a flexible hose 11 which is in turn connected to the single point mooring system 3 to provide a fluid pathway between the flow

line 6 and the pontoon 1.

As seen in Figure 1a, the connection point of the flow lines 6 to the production barge 5 may include means 19 to support the flow lines 6 in a resilient manner if required due to the combination of outside flow line diameter and wave height/wave climate at the site of operation of the mooring and transfer system. The resilient means 19 may take the form of a piston and cylinder arrangement for example.

As mentioned above, the pontoon comprises a number of substantially vertical columns 7 which have a relatively small water line area, typically 20 to 25m<sup>2</sup>, but can have a larger diameter portion 8 as seen in Figure 2, well above the water line to provide reserve buoyancy.

The pontoon 1 is also fitted with ballast water compartments 14 above the water line and the limbs 22, and sea water inlet tanks 15 below the water line in the limbs 20 to enable the buoyancy of the pontoon to be varied and a quick docking and undocking procedure to a tanker keel to be achieved.

The single point mooring system 3 includes a cryogenic fluid swivel to provide a fluid flow path from hose 11 to the pontoon 1. The pontoon 1 is also fitted with means 12 to connect the pontoon 1 with the manifold of a tanker docked with the pontoon 1. The single point mooring 3 is preferably executed as a so-called turret system, with anchor lines 2 connecting the turret 23 to the sea bed and the turret 23 being rotatably fitted to the pontoon 1. The centreline of the turret may be located at the forward edge of the pontoon 1 as illustrated in Figure 2a in solid lines as position 1. This increases the directional

stability of the pontoon 1 in the sea. However, in some situations it may be advantageous to locate the turret 23 at approximately 20 to 50% of the pontoon length behind the forward edge. This is illustrated in dotted lines as position 2 in Figure 2a.

Preferably two flow lines 6 are provided. Each may be of approximately 26" outside diameter and approximately 20" inside diameter, with insulation therebetween, so as to be suitable for carrying cryogenic fluids. The flow lines 6 may include buoyancy aids 24 to support the mid-portion of the flow lines 6. Preferably, when suspended between the pontoon 1 and the barge 5 the flow lines 6 lie at approximately mid depth of the body of water concerned so as to minimise heat influx from warmer surface waters. The fluid in the flow lines 6 can be maintained in a cold condition by re-circulating the fluid through the two flow lines and the piping on the pontoon 1 when there is no tanker docked in the

The pontoon 1 may be fitted with a power plant 13 intended to drive its propulsion system 4, and a boil-off gas compressor and re-liquification plant for vapour discharged from the tanker when loading cryogenic fluid. This power plant 13 may operate on such vapours or boil-off gas from the flow lines 6 when no tanker is present.

The lay-out of the pontoon 1 is designed such that when a tanker is docked with the pontoon, the turret of the single point mooring system 3 is located in the forward third of the tanker length, and the length of the pontoon 1 is such that it just projects past the tanker's mid-ship manifolds. This is illustrated in Figure 3.

Preferably, the pontoon 1 consists of four vertical columns 7 on each side spaced approximately 70 metres apart. It can accommodate tankers in the range of 50,000<sup>4</sup> cubed to 150,000<sup>4</sup> metres cubed and the width<sup>r</sup> of the pontoon 1 between opposing columns 7, seen in Figure 2c, does not exceed the width of the tankers to be accommodated. The pontoon is preferably designed to operate in wave heights up to about 4 metres. The subsea horizontal members of the pontoon are provided with suitable resilient means 17 to allow the pontoon 1 to safely engage against the underside of the tanker keel. In addition, a resilient energy absorbing element 18 is placed at the end of each of the longitudinal limbs 20 to absorb differential motions between the tanker and the pontoon 1 during docking.

20

25

30

35

CLAIMS

1. Apparatus for transferring cryogenic fluid from a first vessel to a second vessel in an off-shore environment, comprising a partly submerged floating dock, variable buoyancy means operable to alter the draught of the dock to enable engagement of the dock with the second vessel, a single point mooring system attached to the dock, and at least one rigid cryogenic pipeline attached between the first vessel and the dock via flexible connection means .
2. Apparatus as claimed in claim 1, further comprising two or more rigid pipelines between the dock and the first vessel and means to enable the return of fluid received at the dock from one pipeline to a second pipeline.
3. Apparatus as claimed in claim 1 or claim 2, wherein the single point mooring system comprises a turret rotatably mounted to the dock and anchor lines attached to the turret.
4. Apparatus as claimed in claim 3, wherein the turret is mounted with its centreline forward of a leading edge of the dock.
5. Apparatus as claimed in claim 3, wherein the turret is mounted with its centreline rearward of a leading edge of a dock by approximately 20 to 50% of the length of the dock.
6. Apparatus as claimed in a preceding claim, wherein the dock comprises a floor structure engagable against the hull of the second vessel and a plurality of columns projecting upwardly from the floor structure, wherein the cross-sectional area of the

columns at the water line is in the region of 20 to 25m<sup>2</sup>.

5 7. Apparatus as claimed in claim 6, wherein the variable buoyancy means comprises ballast compartments extending between the columns above the water line.

10 8. Apparatus as claimed in claim 6 or claim 7, wherein the variable buoyancy means further comprises ballast compartments located in the floor structure beneath the water line.

15 9. Apparatus as claimed in a preceding claim, wherein the dock is designed to accommodate tankers in the range from 50,000m<sup>3</sup> to 150,000m<sup>3</sup>.

20 10. Apparatus as claimed in any preceding claim, wherein the dock further comprises a position control system and thrust producing devices.

11. Apparatus substantially as hereinbefore described and with reference to the accompanying drawings.

25

: 426353: SEM: LWC: LONDOCS

30

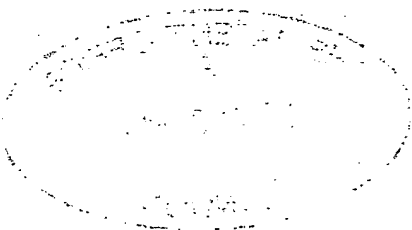


Fig. 1a.

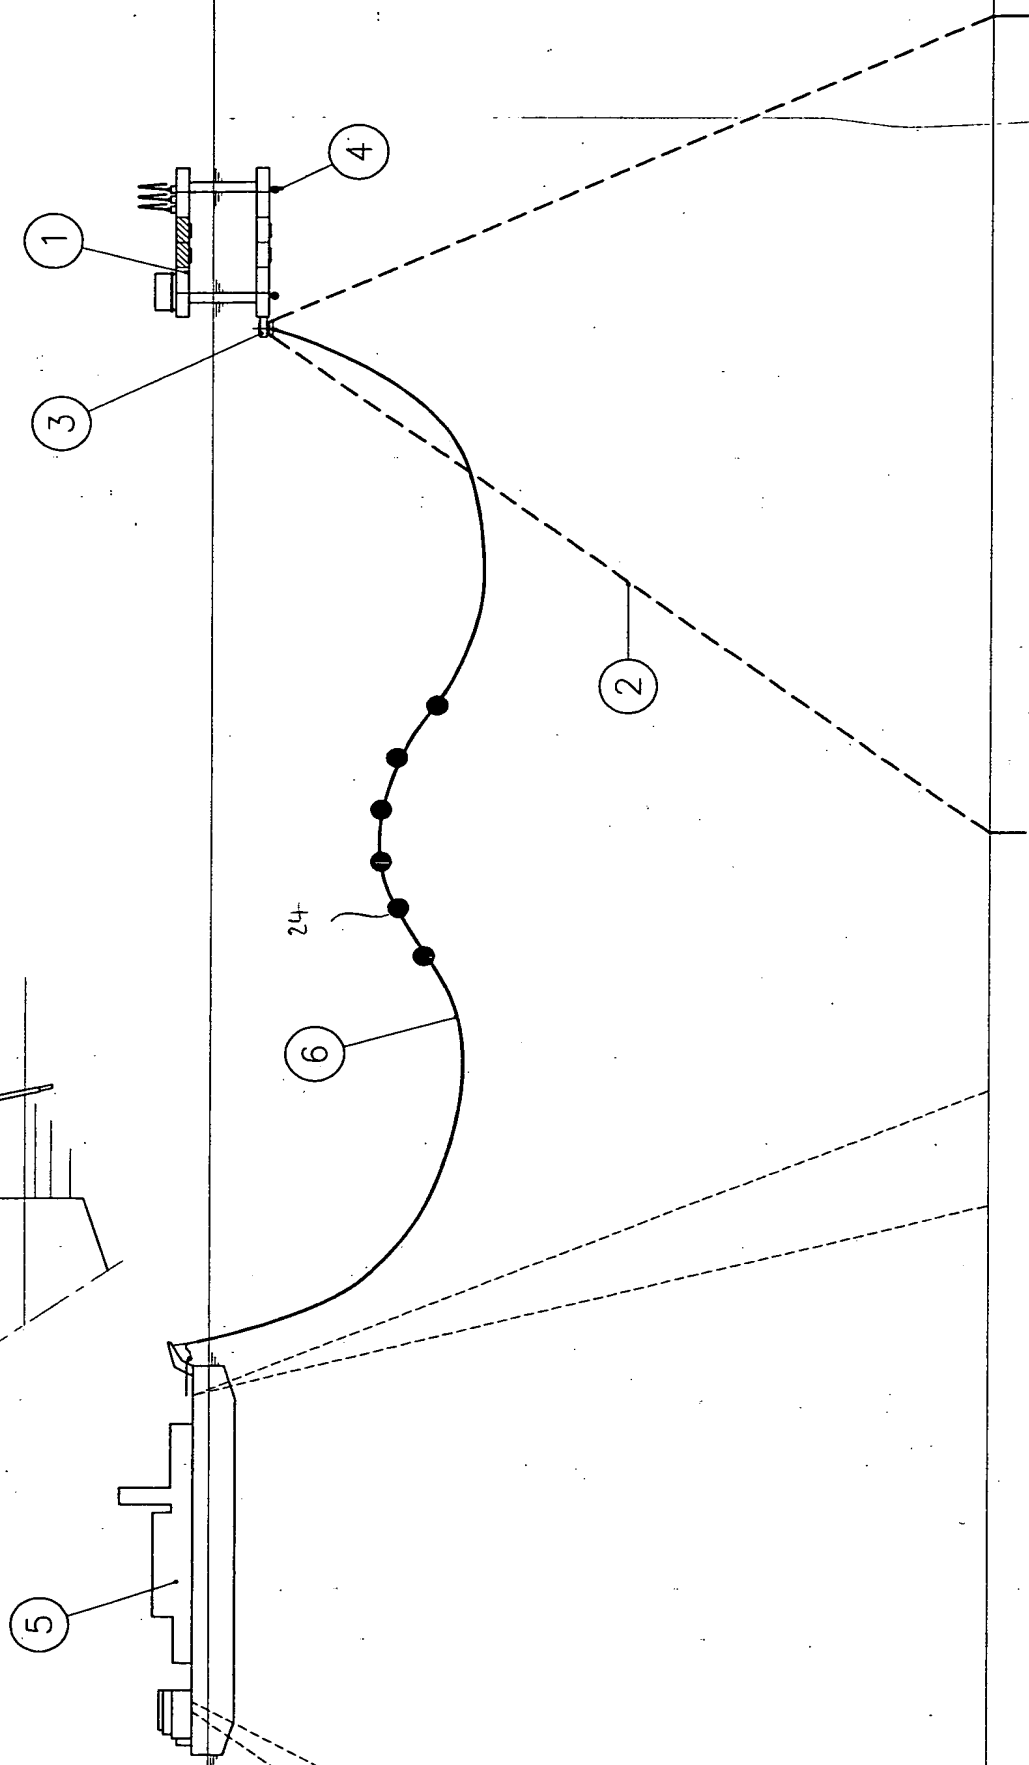
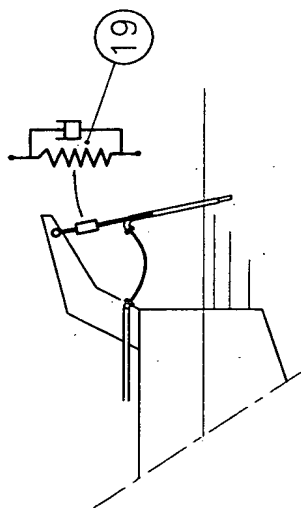


FIG. 1 GENERAL LAY-OUT






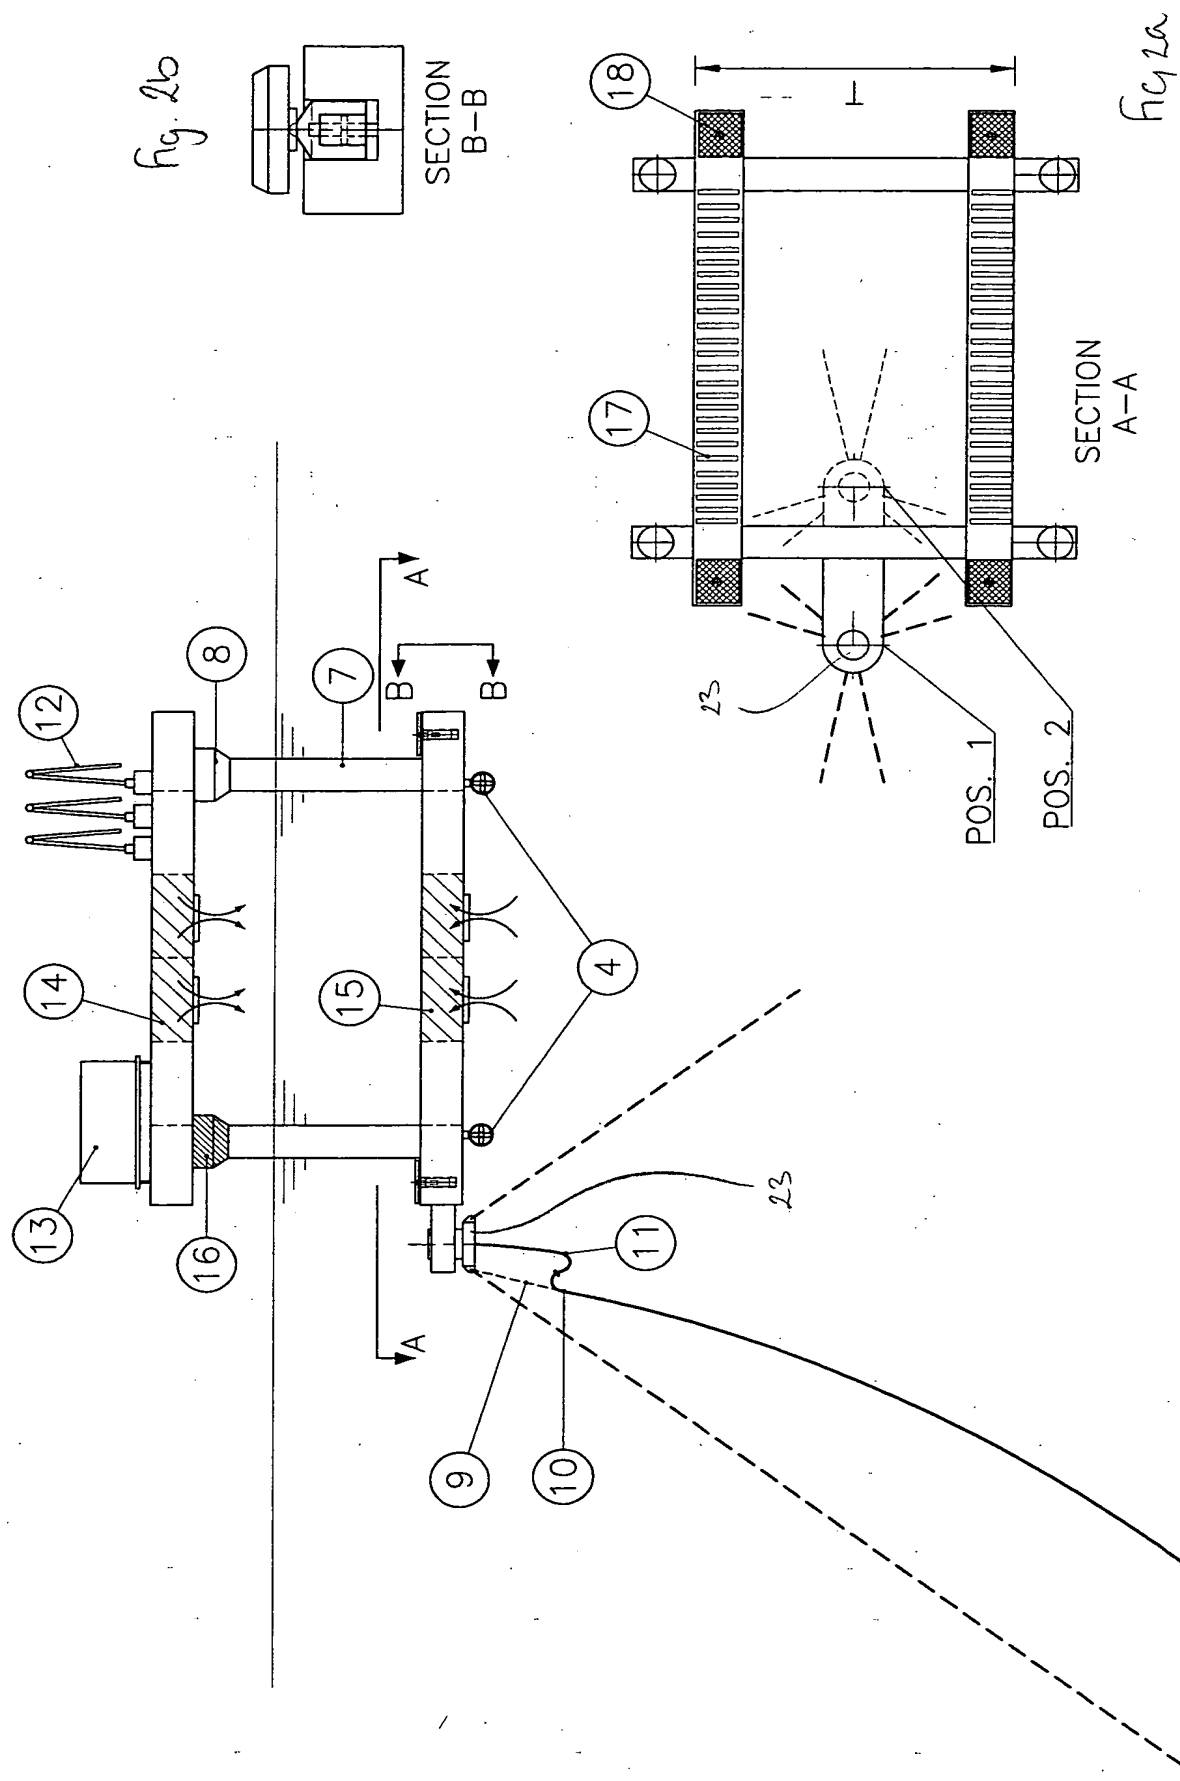


FIG. 2 FLOATING PONTOON



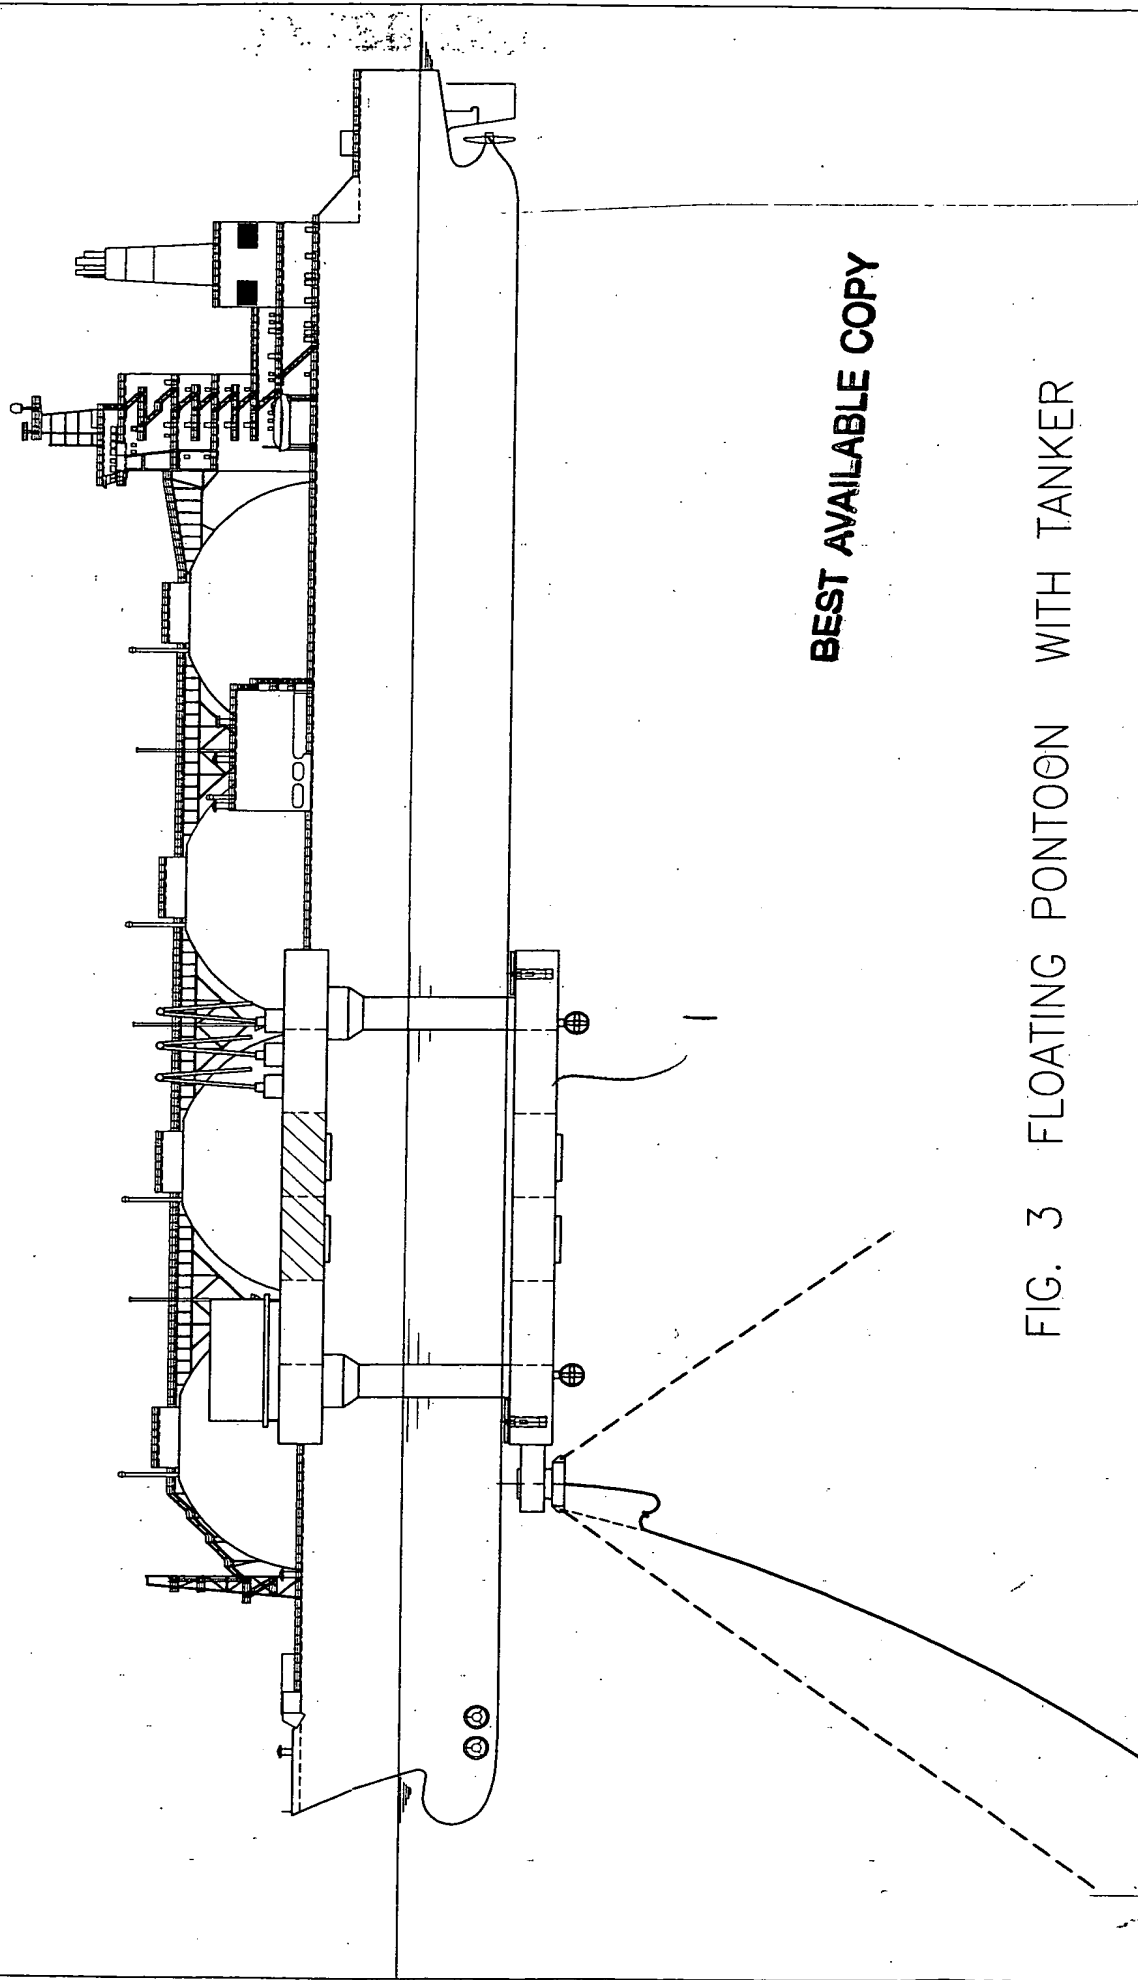

**BEST AVAILABLE COPY**

**FIG. 3 FLOATING PONTOON WITH TANKER**



BEST AVAILABLE COPY

Fig. 4

